


Technical Data Sheet	<b>MSF37(L)</b>	Special liquids
----------------------	-----------------	-----------------

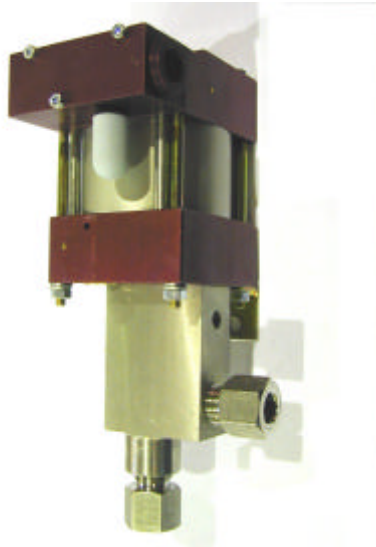

**Technical Data:**

Air drive pressure:	1-10 bar / 14,5—145 psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi	470 bar/ 6,670 psi
Pressure ratio:	1:47
Displacement volume/double stroke	2.8 cm <sup>3</sup> / 0.17 cu.inch
<b>Connections</b>	
Inlet:	Standard: Bottom inlet 3/8 BSP
Outlet:	3/8 BSP
Air drive	3/8 BSP
Maximum operating temperature	60°C
Net weight	3.5 kg

**MSF37(L)**

Single acting, single air drive head and distance piece (Standard= Bottom inlet)

Pressure and flow performances, please see enclosed graph.

<b>Wetted materials of construction:</b>	seal package:	MSF37(L): Filled Teflon (PTFE) Fluorcarbon (V)
	Pump Body:	1.4571
	Piston:	1.4571
	Fittings:	1.4305
<b>Approximate Dimensions:</b>	Height:	247 mm
	Depth:	112 mm
	Width:	108 mm
	Side inlet	MSF37(L) <b>S</b>
	Special inlet and outlet ports, i.e. NPT	MSF37(L)- <b>NPT</b>
	Special seal material to handle special fluids on request.	
<b>Available Accessories</b>		
Air control units for M series with filter pressure regulator, control pressure gauge and shut off valve:	MSF37(L) <b>with C1</b>	
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	MSF37(L) <b>with C1/SVair</b> (The required outlet pressure has to be indicated.)	

**Please consult factory for more information.**

All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.



## Leistungsdiagramm/Performance Graph M(O)(SF) 37

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

