


Technical Data Sheet	G500-2(L)S	Oil and water service
----------------------	-------------------	-----------------------

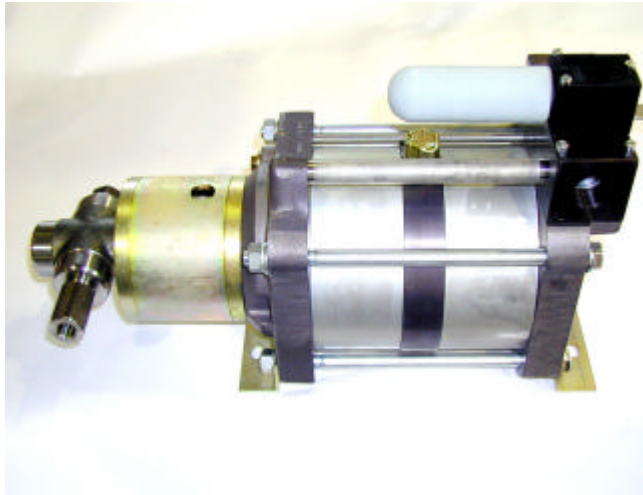

Technical Data:

Air drive pressure:	1-10 bar / 14,5—145 psi
Maximum permitted outlet pressure	5,500 bar/ 79,750 psi
Pressure ratio:	1:1,038
Displacement volume/double stroke	1.4 cm ³ / 0.09 cu.inch
Connections	
Inlet:	Side inlet: 1/4 BSP
Outlet:	Standard: 5/8-18UNF
Air drive	3/4 BSP
Maximum operating temperature	60°C
Net weight	22.0 kg

G500-2(L)S

single acting, double air drive head
(Only side inlet available)


Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:	seal package:	G500-2(L)S: Polyurthane, Buna N
	Pump Body:	1.4313
	Piston	Hard metal, Bracket: 1.4112
	Fittings	17-4-PH
Approximate Dimensions:	Height:	462 mm
	Depth:	211 mm
	Width:	272 mm
	Side inlet:	G500-2(L)S
	Special inlet ports, i.e. NPT	G500-2(L)S with NPT inlet
	Special seal material to handle special fluids on request.	
Available Accessories		
Air control units for G series with filter pressure regulator, control pressure gauge and shut off valve:	G500-2(L)S with C2	
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	G500-2(L)S with C2/SVair (The required outlet pressure has to be indicated.)	

Please consult factory for more information.

All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Standard pump comes with BSP and UNF ports as indicated and bottom inlet.

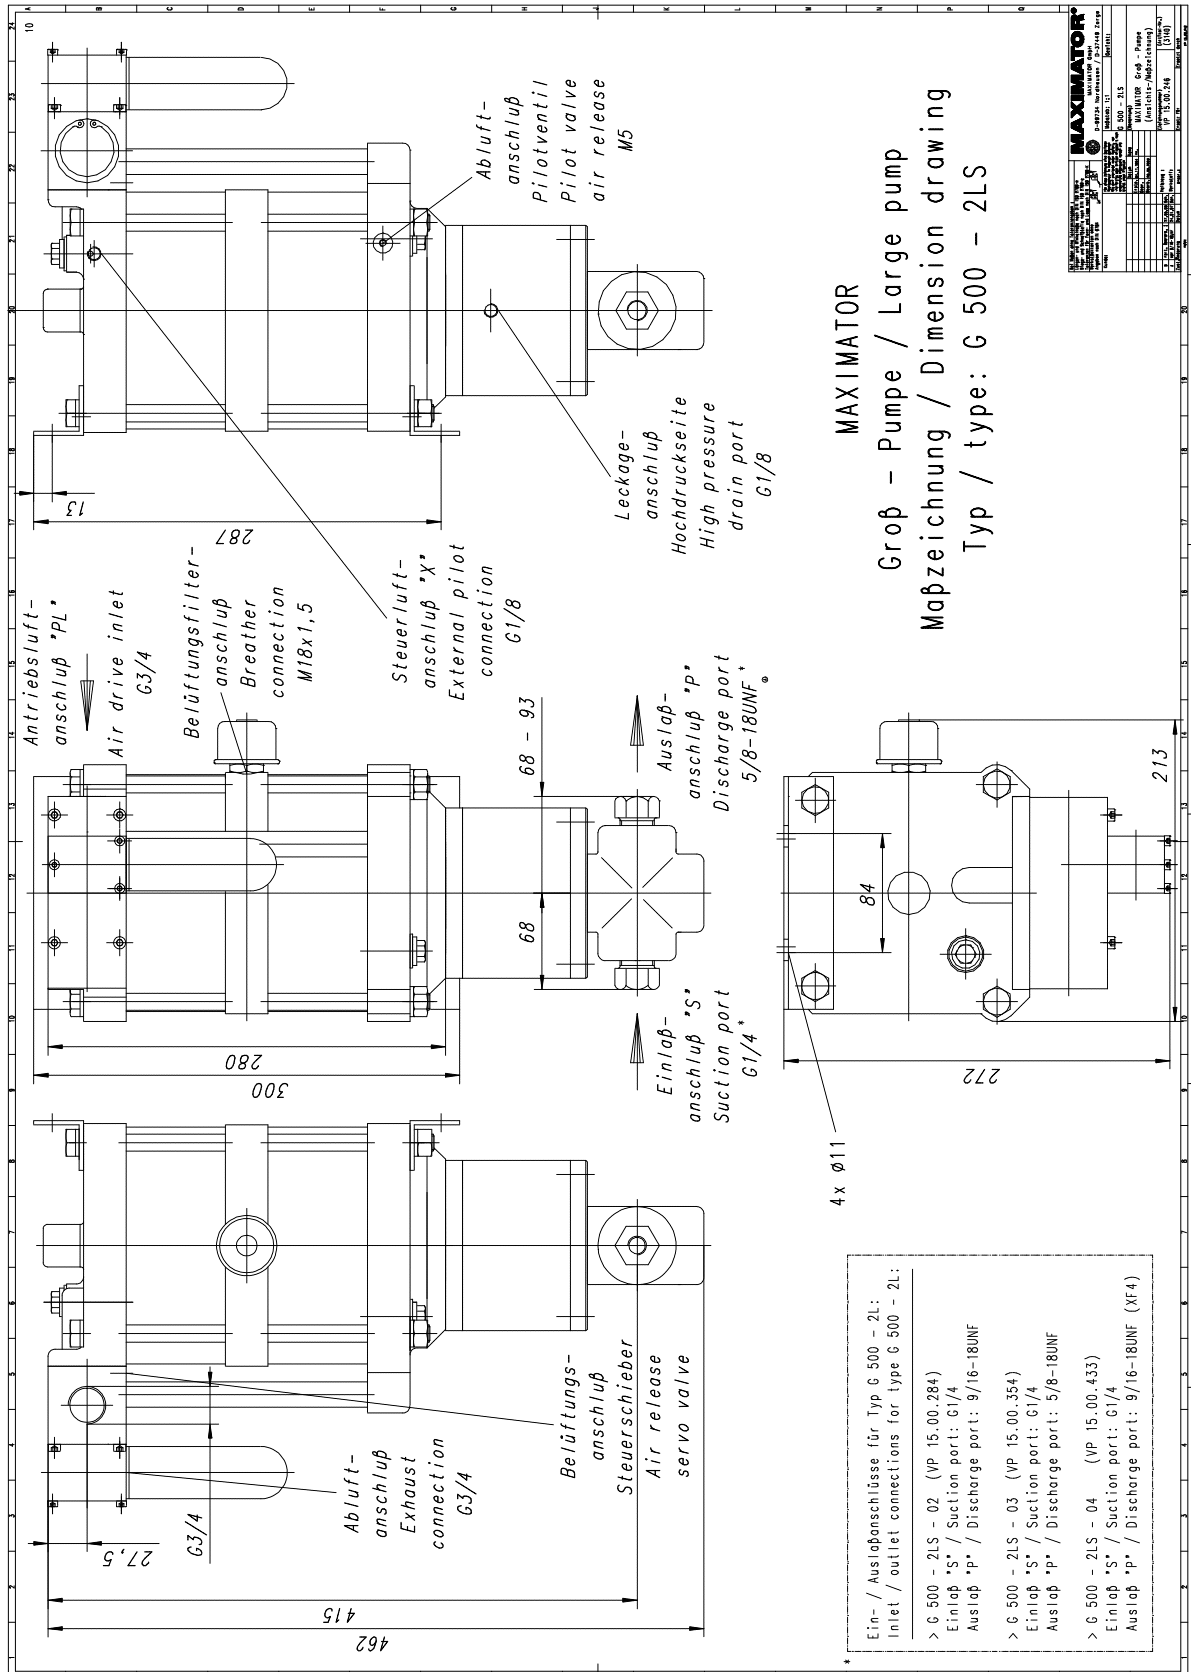

Leistungsdiagramm/Performance Graph

G 500 -2LS

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

$P_{E,max.}$ /Max.outlet pressure 5500 bar

